

Zytel® PLUS PLS95G50DH2 BK261 NYLON RESIN

Product Description

Zytel® PLS95G50DH2 BK261 is a high flow 50% glass reinforced PA nylon resin using SHIELD Technology, only from DuPont providing exceptional Heat Resistance & High stiffness for automotive under hood applications like charge air cooler caps.

General

Material Status	• Preliminary Data ¹		
Availability	• Africa & Middle East • Asia Pacific • Central America	• Europe • Latin America • North America	• South America
Filler / Reinforcement	• Glass Fiber Reinforcement, 50% Filler by Weight		
Features	• Copolymer • Good Flow	• Good Thermal Stability • Ultrasonic Weldable	
Uses	• Automotive Applications	• Automotive Under the Hood	• High Temperature Applications
RoHS Compliance	• Contact Manufacturer		
Appearance	• Black		
Forms	• Pellets		
Processing Method	• Injection Molding		
Multi-Point Data	• Isothermal Stress vs. Strain (ISO 11403-1)		
Part Marking Code (ISO 11469)	• >PA-GF50<		
Resin ID (ISO 1043)	• PA-GF50		
Product Category	• Glass Reinforced Resins	• SHIELD Technology Resins	

Physical	Dry	Conditioned	Unit	Test Method
Density	1.59	--	g/cm ³	ISO 1183
Molding Shrinkage				ISO 294-4
Across Flow: 2.00 mm	0.60	--	%	
Flow: 2.00 mm	0.30	--	%	
Water Absorption (Equilibrium, 23°C, 50% RH)	1.3	--	%	ISO 62
Mechanical	Dry	Conditioned	Unit	Test Method
Tensile Modulus (23°C)	16900	12300	MPa	ISO 527-2
Tensile Stress (Break, 23°C)	247	175	MPa	ISO 527-2
Tensile Strain (Break, 23°C)	2.6	5.0	%	ISO 527-2
Flexural Modulus (23°C)	15700	--	MPa	ISO 178
Flexural Strength (23°C)	374	--	MPa	ISO 178
Impact	Dry	Conditioned	Unit	Test Method
Charpy Notched Impact Strength				ISO 179/1eA
-30°C	18	--	kJ/m ²	
23°C	16	--	kJ/m ²	
Charpy Unnotched Impact Strength				ISO 179/1eU
-30°C	80	85	kJ/m ²	
23°C	95	90	kJ/m ²	
Thermal	Dry	Conditioned	Unit	Test Method
Heat Deflection Temperature				
0.45 MPa, Unannealed	263	--	°C	ISO 75-2/B
1.8 MPa, Unannealed	254	--	°C	ISO 75-2/A
Melting Temperature ³	265	--	°C	ISO 11357-3
CLTE				ISO 11359-2
Flow: 23 to 55°C	0.000010	--	cm/cm/°C	
Transverse: 23 to 55°C	0.000085	--	cm/cm/°C	

Rev: July, 2013

Page: 1 of 3

To find out more, visit [DuPont Performance Polymers](#) or contact the nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



**Zytel® PLUS PLS95G50DH2 BK261
NYLON RESIN**

Injection	Dry Unit
Drying Temperature	80.0 °C
Drying Time	2.0 to 4.0 hr
Suggested Max Moisture	< 0.20 %
Processing (Melt) Temp	280 to 300 °C
Melt Temperature, Optimum	290 °C
Mold Temperature	70.0 to 120 °C
Mold Temperature, Optimum	100 °C
Drying Recommended	Yes, if moisture content of resin exceeds recommended level

Isothermal Stress vs. Strain (ISO 11403-1)

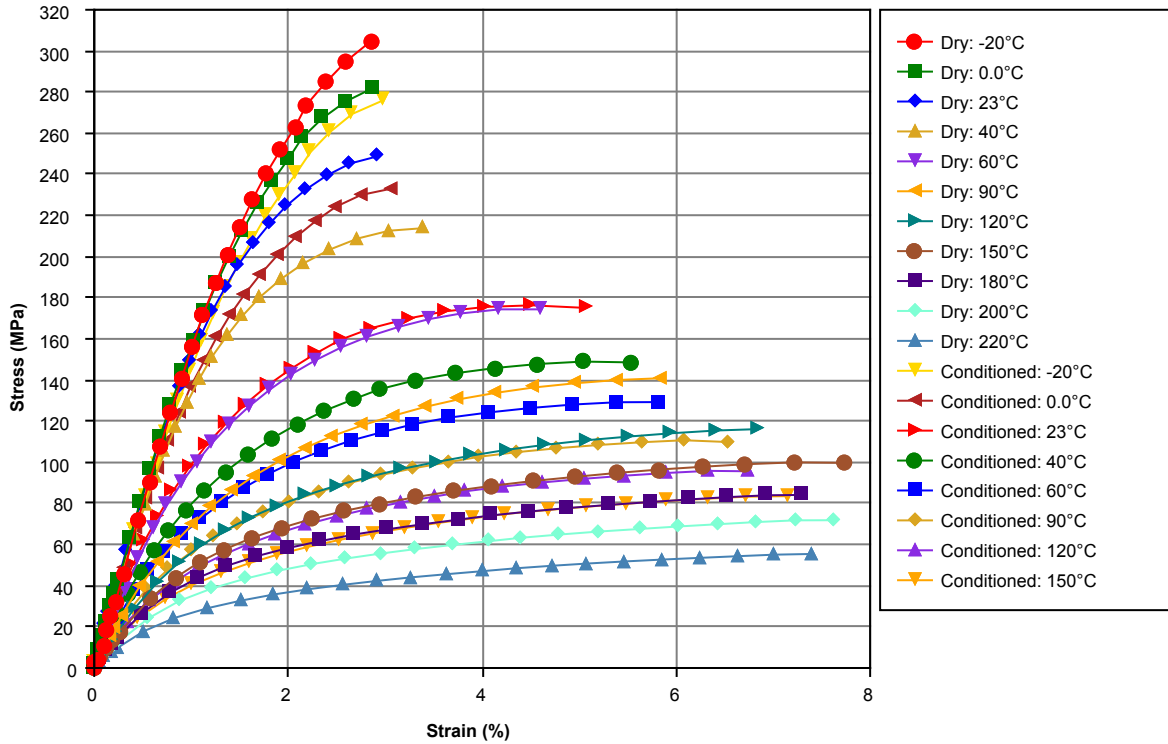

Notes

¹ The above data are preliminary and are subject to change as additional data are developed on subsequent lots.

² Typical properties: these are not to be construed as specifications.

³ 10°C/min

To find out more, visit [DuPont Performance Polymers](#) or contact the nearest DuPont location.

North America

Tel: +1 302 999-4592
Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Zytel® PLUS PLS95G50DH2 BK261 NYLON RESIN

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc.

ISO Mechanical properties measured at 4.0mm, ISO Electrical properties measured at 2.0mm, and all ASTM properties measured at 3.2mm.

Test temperatures are 23°C unless otherwise stated.

The information provided in this data sheet corresponds to our knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials, additives or pigments or in any process, unless expressly indicated otherwise. The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use and disposal conditions, DuPont does not guarantee favorable results, makes no warranties and assumes no liability in connection with any use of this information. All such information is given and accepted at the buyer's risk. It is intended for use by persons having technical skill, at their own discretion and risk. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent. DuPont advises you to seek independent counsel for a freedom to practice opinion on the intended application or end-use of our products.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative. You may also request a copy of DuPont POLICY Regarding Medical Applications H-50103-4 and DuPont CAUTION Regarding Medical Applications ... H-50102-4

To find out more, visit [DuPont Performance Polymers](#) or contact the nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11

